


ZK4800-8002-xxxx | Motor connection cable 1 mm² with itec[®] plug system, fixed installation



itec[®] (Series 915), plug, straight, female, Power: 3+PE, Signal: 5 – Pitch dimension 7.62 mm, plug, angled, female, 4-pin

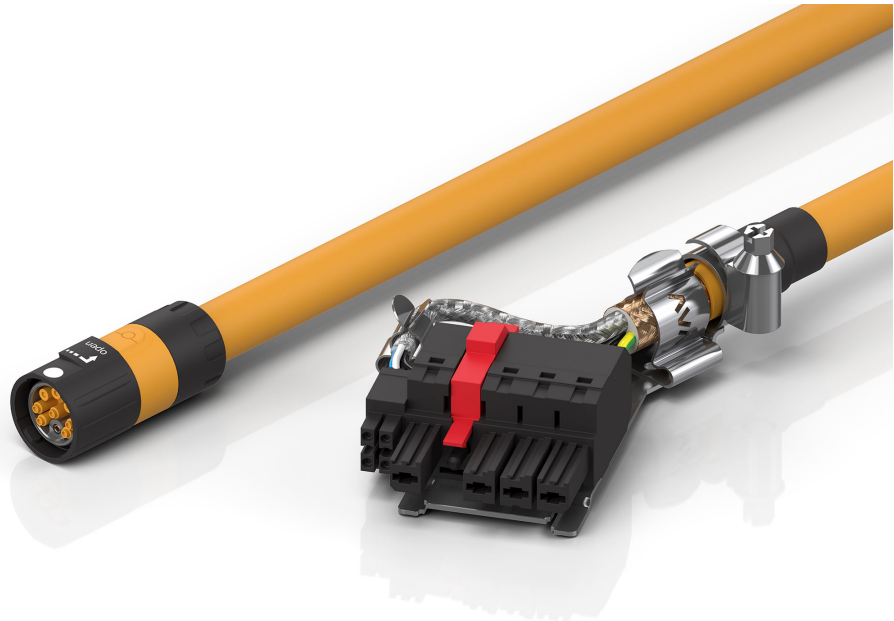

Plugs


Electrical data	Head A	Head B
Rated voltage (power)	630 V AC/DC	1000 V AC/DC (according to IEC 60664-1, IEC 61984), 600 V (accordig to UL 1059)
Rated voltage (signal/24V)	63 V AC/DC	-
Rated current (power)	14 A	34 A at 40 °C (according to IEC 60664-1, IEC 61984), 33 A at 40 °C (according to UL 1059)
Rated current (signal/24V)	3.6 A	-
Rated impulse voltage (power)	6.0 kV	8.0 kV
Rated impulse voltage (signal/24V)	1.5 kV	-
Contact resistance	< 5 mΩ	4.5 mΩ
Insulation resistance	-	≥ 100 MΩ (according to IEC 60512)
Insulation group	-	II
Mechanical data		
Accessories type	Connectors/Cables	Connectors/Cables


Installation size	itec® (Series 915)	Pitch dimension 7.62 mm
Connector type	plug	plug
Configuration	straight	angled
Contact type	female	female
Number of positions (face)	Power: 3+PE, Signal: 5	4-pin
Wire termination	crimp connection	PUSH IN
Mating cycles	500	25
Way of locking	bayonet	flange and screw
Weight per piece	0.035 kg (0.0772 lb)	0.029 kg (0.0640 lb)
Body color	black, similar to RAL 9011	black, similar to RAL 9011
Body material	zinc diecast/plastic	PA GF, UL 94 V-0
Seal	FKM	-
Clamp ring	brass/nickel plated	-
Contact carrier material	PBT, PA, UL 94 V-0	PA GF, UL 94 V-0
Contact material	brass/gold plated	copper alloy
Max. wire cross-section	-	AWG24 ... AWG8 (0.5 mm ² ... 10 mm ²)
Environmental data		
Special features	Max. height for operation 2000 m	-
Shock resistance	30 g (conforms to EN 60060-2-27), 11 ms; 18 shocks per direction, 3 axes	-
Vibration resistance	10 g (conforms to EN 60068-2-27), 50 Hz...2000 Hz; 1 Octave/min.; 10 cycles per axis	-
Ambient temperature (operation)	-20...+130 °C, -4...+266 °F	-50...+125 °C, -58...+257 °F
Protection rating	IP66/67 in screwed condition	IP20
Pollution level	3 (according to VDE 0110/EN61984 part 6.19.2.2)	3
Overvoltage category	3 (according to VDE 0110/EN61984 part 6.19.2.2)	3

Cable

Electrical data		
Operating voltage	max. 1000 V AC (UL)	
Insulation resistance	≥ 500 MΩ * km (DIN EN 50395)	
Mutual capacitance	AWG 26: nom. 45 nF/km	
Wire resistance (power)	≤ 21.0 Ω/km	
Wire resistance (signal/24V)	≤ 145.0 Ω/km	
Wire resistance (brake)	≤ 42.0 Ω/km	

Characteristic impedance	Signal: 110 $\Omega \pm 10 \Omega$ (10 MHz) acc. to EN50289-1-11
Test voltage	4000 V (wire/wire), 3000 V (wire/screen)
Mechanical data	
Cross-section (power)	1.00 mm ² (approx. AWG18)
Cross-section (signal)	AWG26 (approx. 0.14 mm ²)
Cross-section (brake)	0.50 mm ² (approx. AWG20)
Outer cable diameter	10.0 mm \pm 0.3 mm (0.3937" \pm 0.0118")
Min. bending radius, fixed installation	4 x outer cable diameter
Conductor material	copper bare
Optical covering factor of shielding	\geq 85%
Use	fixed installation
Jacket color	orange
Material jacket	PVC (polyvinyl chloride)
Wire insulation material	PO (Polyolefine)
Printing color	black
Environmental data	
Operation temperature range, fixed installation	-20...+80 °C, -4...+176 °F
Silicone-free	yes
Approvals	UL-Style AWM 2570 80°C 1000V

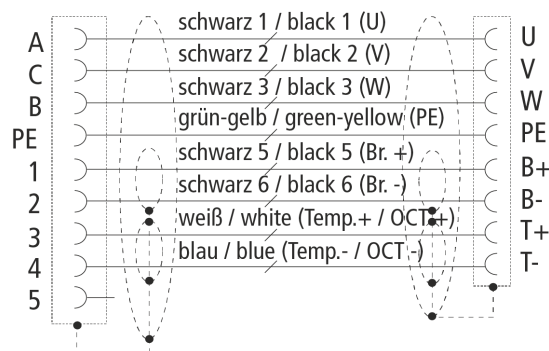Contact assembly**Dimensions**

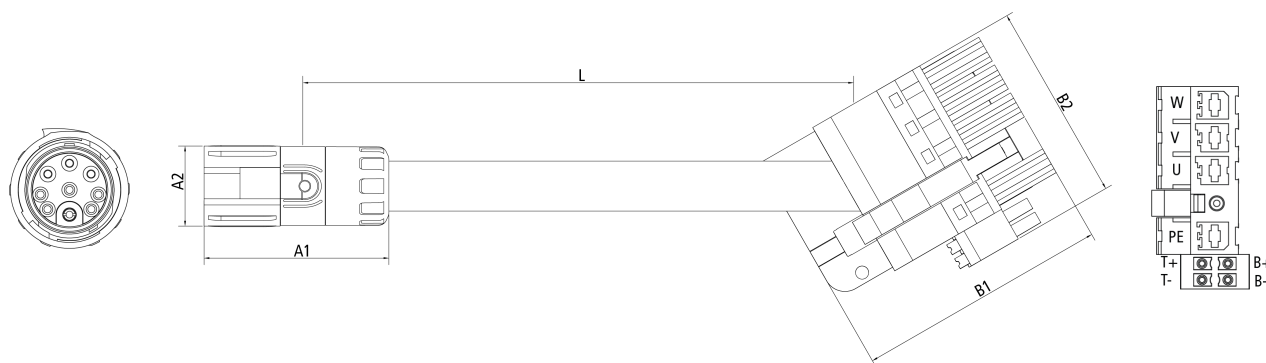

A1	44.00 mm
A2	19.00 mm
B1	60.00 mm
B2	47.00 mm

Notes

- Depending on the cable length (L), the following length tolerances apply: $\pm 2-3\%$
- Illustrations similar
- The last three digits of the ordering information is the cable length in decimeters, e.g. ZK4xxx-xxxx-x020 = cable length 2.00 m

Ordering information	Length
ZK4800-8002-xxxx	xxxx = cable length in decimeters
xxxx = 0050	example for 5 m length
	sold by the meter, admissible total cable length see documentation of Servo Drive

Beckhoff®, TwinCAT®, TwinCAT/BSD®, TC/BSD®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, Safety over EtherCAT®, TwinSAFE®, XFC®, XTS® and XPlanar® are registered trademarks of and licensed by Beckhoff Automation GmbH. Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.

© Beckhoff Automation GmbH & Co. KG 12/2022

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual application do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.