

# ZK4800-8025-xxxx | Motor connection cable 4 mm<sup>2</sup> with M40 speedtec<sup>®</sup> plug system, drag-chain suitable



M40, plug, straight, female, Power: 4+PE, Signal: 4 – Pitch dimension 7.62 mm,  
plug, angled, female, 4-pin



## Plugs

| Electrical data                    | Head A                          | Head B  |
|------------------------------------|---------------------------------|---|
| Rated voltage (power)              | 630 V AC / 850 V DC             | 1000 V AC/DC (according to IEC 60664-1, IEC 61984), 600 V (according to UL 1059)          |
| Rated voltage (signal/24V)         | 150 V AC/DC                     | -   |
| Rated current (power)              | 70 A max.                       | 34 A at 40 °C (according to IEC 60664-1, IEC 61984), 33 A at 40 °C (according to UL 1059) |
| Rated current (signal/24V)         | 7 A max.                        | -   |
| Rated impulse voltage (power)      | 6.0 kV                          | 8.0 kV  |
| Rated impulse voltage (signal/24V) | 2.5 kV                          | -   |
| Contact resistance                 | < 5 mΩ (signal), < 1 mΩ (power) | 4.5 mΩ  |
| Insulation resistance              | -                               | ≥ 100 MΩ (according to IEC 60512)   |
| Insulation group                   | -                               | II  |
| Mechanical data                    |                                 |   |

| Accessories type                | Connectors/Cables                               | Connectors/Cables  |
|---------------------------------|---|--|
| Installation size               | M40   | Pitch dimension 7.62 mm                                      |
| Connector type                  | plug  | plug   |
| Configuration                   | straight  | angled   |
| Contact type                    | female  | female   |
| Number of positions (face)      | Power: 4+PE, Signal: 4                          | 4-pin  |
| Wire termination                | crimp connection                                | PUSH IN  |
| Mating cycles                   | 500   | 25   |
| Way of locking                  | Speedtec®                                       | flange and screw   |
| Weight per piece                | 0.450 kg (0.9921 lb)                            | 0.029 kg (0.0640 lb)   |
| Body color                      | metal   | black, similar to RAL 9011                                   |
| Body material                   | zinc diecast/nickel plated                      | PA GF, UL 94 V-0   |
| Seal                            | FKM   | -  |
| Clamp ring                      | zinc diecast/nickel plated                      | -  |
| Contact carrier material        | PA 6.6 mod., UL 94 V-0                          | PA GF, UL 94 V-0   |
| Contact material                | brass/gold plated                               | copper alloy   |
| Max. wire cross-section         | -   | AWG24 ... AWG8 (0.5 mm <sup>2</sup> ... 10 mm <sup>2</sup> ) |
| Environmental data              |   |  |
| Special features                | Max. height for operation 2000 m                | -  |
| Ambient temperature (operation) | -20...+130 °C, -4...+266 °F                     | -50...+125 °C, -58...+257 °F                                 |
| Protection rating               | IP66/67 in screwed condition                    | IP20   |
| Pollution level                 | 3 (according to VDE 0110/EN61984 part 6.19.2.2) | 3  |
| Overvoltage category            | 3 (according to VDE 0110/EN61984 part 6.19.2.2) | 3  |

## Cable


| Electrical data                         |  |  |
|---|--|--|
| Operating voltage                       | max. 1000 V AC (UL), U <sub>0</sub> /U 600/1000 V (VDE)                    |  |
| Insulation resistance                   | ≥ 500 MΩ * km (DIN EN 50395)   |  |
| Mutual capacitance                      | Signal: 45 ± 15 pF/m, Power: 90 pF/m (at 800 Hz according to EN 50289-1-5) |  |
| Wire resistance (power)                 | ≤ 4.95 Ω/km (DIN EN 50395)   |  |
| Wire resistance (signal/24V)            | ≤ 55.0 Ω/km (DIN EN 50395)   |  |
| Wire resistance (brake)                 | ≤ 20.0 Ω/km (DIN EN 50395)   |  |
| Characteristic impedance                | Signal: 110 Ω ± 10 Ω (10 MHz) acc. to EN50289-1-11                         |  |
| Dielectric strength wire/wire (power)   | 4 kV 50 Hz 5 min. (DIN VDE 0472 T.509C)                                    |  |
| Dielectric strength wire/shield (power) | 4 kV 50 Hz 5 min. (DIN VDE 0472 T.509C)                                    |  |

|   |   |
|---|---|
| Dielectric strength wire/wire (signal/24V)      | 3 kV 50 Hz 1 min. (DIN VDE 0472 T.509C)   |
| Dielectric strength wire/shield (signal/24V)    | 3 kV 50 Hz 1 min. (DIN VDE 0472 T.509C)   |
| <b>Mechanical data</b>                          |   |
| Cross-section (power)                           | 4.00 mm <sup>2</sup> (approx. AWG12)  |
| Cross-section (signal)                          | AWG22 (approx. 0.34 mm <sup>2</sup> )   |
| Cross-section (brake)                           | 1.00 mm <sup>2</sup> (approx. AWG18)  |
| Outer cable diameter                            | 15.9 mm ± 0.4 mm (0.6259" ± 0.0157")  |
| Min. bending radius, moved in drag-chain        | 7 x outer cable diameter  |
| Min. bending radius, fixed installation         | 5 x outer cable diameter  |
| Weight  | 420 kg/km (282.198 lb/1000 ft)  |
| Conductor material                              | copper bare   |
| Optical covering factor of shielding            | ≥ 85%   |
| Use   | drag-chain suitable   |
| Max. acceleration                               | 30 m/s <sup>2</sup> by 5 m travel distance<br>15 m/s <sup>2</sup> by 10 m travel distance<br>5 m/s <sup>2</sup> by 20 m travel distance |
| Max. speed                                      | 4 m/s   |
| Max. travel distance                            | 20 m (horizontal)<br>5 m (vertical)   |
| Max. number of cycles                           | 5 million   |
| Jacket color                                    | orange  |
| Material jacket                                 | TPU (thermoplastic polyurethane)  |
| Wire insulation material                        | PP (polypropylene)  |
| Printing color                                  | black   |
| Torsion angle in °/m                            | max. ± 30 °/m   |
| Max. tensile load, dynamic                      | 20 N/mm <sup>2</sup>  |
| Max. tensile load, static                       | 50 N/mm <sup>2</sup>  |
| <b>Environmental data</b>                       |   |
| Operation temperature range, moved              | -20...+80 °C, -4...+176 °F. In drag-chain with mechanical strain: -20...+60 °C, -4...+140 °F  |
| Operation temperature range, fixed installation | -40...+80 °C, -40...+176 °F   |
| Oil resistance                                  | according to DIN EN 60811-404, HD22.10 appendix A   |
| Flame-retardant                                 | according to IEC 60332-1-2 UL758 cable flame test   |
| CFC-free  | yes   |
| Halogen-free                                    | according to DIN VDE 0472 Teil 815  |
| Silicone-free                                   | yes   |
| RoHS compliant                                  | yes   |


Approvals

UL758 (AWM) Style 21223 (jacket) and Style 10492 (core)

## Contact assembly

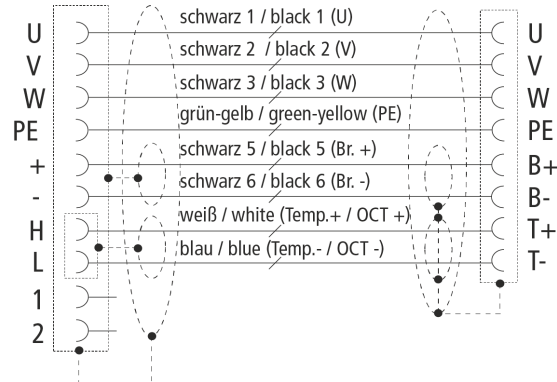

## Dimensions

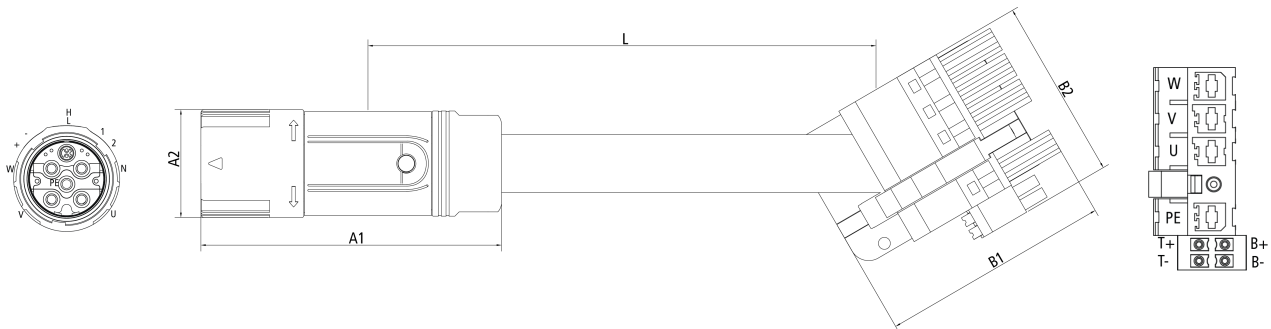

|    |           |
|----|-----------|
| A1 | 100.00 mm |
| A2 | 46.00 mm  |
| B1 | 60.00 mm  |
| B2 | 47.00 mm  |

## Notes

- Depending on the cable length (L), the following length tolerances apply:  $\pm 2-3\%$
- Illustrations similar
- The last three digits of the ordering information is the cable length in decimeters, e.g. ZK4xxx-xxxx-x020 = cable length 2.00 m

## Ordering information

## Length

ZK4800-8025-xxxx

xxxx = cable length in decimeters

xxxx = 0050

example for 5 m length

sold by the meter, admissible total cable length see documentation of Servo Drive

Beckhoff®, TwinCAT®, TwinCAT/BSD®, TC/BSD®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, Safety over EtherCAT®, TwinSAFE®, XFC®, XTS® and XPlanar® are registered trademarks of and licensed by Beckhoff Automation GmbH. Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.

© Beckhoff Automation GmbH & Co. KG 12/2022

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual application do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.