


# ZK4810-8020-xxxx | Encoder connection cable EnDat 2.2, drag-chain suitable



M23, plug, straight, female, 17-pin – D-sub, socket, angled, male, 15-pin

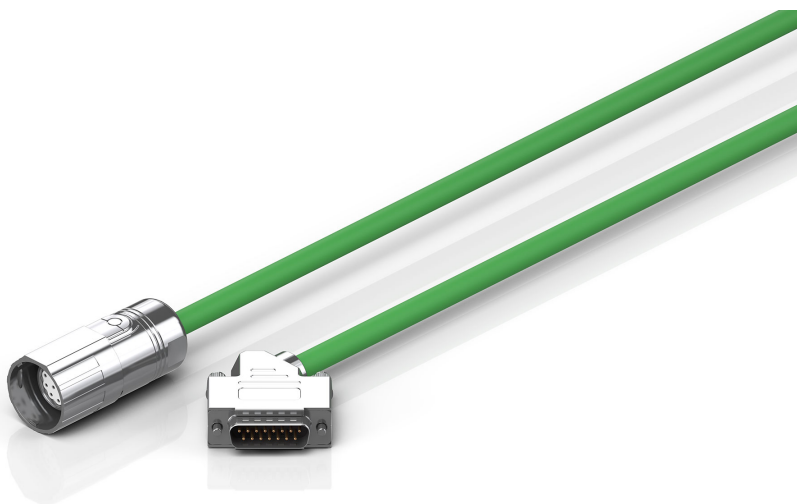

## Plugs

Electrical data	Head A	Head B
Rated voltage (signal/24V)	125 V AC/DC	-
Rated current (signal/24V)	7 A max.	-
Rated impulse voltage (signal/24V)	2.0 kV	-
Contact resistance	< 5 mΩ	-
Mechanical data		
Accessories type	Connector/cable	Connector/cable
Installation size	M23	D-sub
Connector type	plug	socket
Configuration	straight	angled
Contact type	female	male
Number of positions (face)	17-pin	15-pin
Wire termination	crimp connection	solder connection
Mating cycles	500	-
Way of locking	Speedtec®	screw

Weight per piece	0.089 kg (0.1962 lb)	0.055 kg (0.1213 lb)
Body colour	metal	metal
Body material	zinc diecast/nickel plated	zinc diecast/nickel plated
Seal	FKM	-
Clamp ring	brass/nickel plated	-
Contact carrier material	PBT, UL 94 V-0	-
Contact material	brass/gold plated	-
<b>Environmental data</b>		
Special features	Max. height for operation 2000 m	-
Ambient temperature (operation)	-20...+130 °C, -4...+266 °F	-40...+120 °C, -40...+248 °F
Protection class	IP 66/67 in screwed condition	IP 20
Pollution level	3 (according to VDE 0110/EN61984 part 6.19.2.2)	-
Overvoltage category	3 (according to VDE 0110/EN61984 part 6.19.2.2)	-

## Cable


<b>Electrical data</b>		
Operating voltage	30 V	
Insulation resistance	$\geq 1 \text{ G}\Omega \cdot \text{km}$	
Wire resistance	0.34 mm <sup>2</sup> : $\leq 53.2 \text{ }\Omega/\text{km}$ , 0.5 mm <sup>2</sup> : $\leq 40.1 \text{ }\Omega/\text{km}$	
Test voltage	800 V (wire/wire and wire/screen)	
<b>Mechanical data</b>		
Cross section	4 x 2 x 0.34 mm <sup>2</sup> + 1 x 4 x 0.5 mm <sup>2</sup>	
Min. bending radius, moved in drag chain	60 mm	
Min. bending radius, fixed installation	40 mm	
Outer cable diameter	9.0 mm $\pm$ 0.4 mm (0.3543" $\pm$ 0.0157")	
Conductor material	copper, tinned	
Optical covering factor of shielding	$\geq 80\%$	
Use	drag-chain suitable	
Max. acceleration	60 m/s <sup>2</sup>	
Max. speed	10 m/s	
Max. number of cycles	10 million	
Jacket colour	green	
Material jacket	PUR (polyurethane)	
Wire insulation material	PP (polypropylene)	

Printing colour	black
Torsion angle in °/m	max. ± 30 °/m
Max. tensile load, dynamic	20 N/mm <sup>2</sup>


#### Environmental data

Operation temperature range, moved	-40...+80 °C, -40...+176 °F
Operation temperature range, fixed installation	-50...+80 °C, -58...+176 °F
Oil resistance	according to UL 1581
Flame-retardant	according to IEC 60332-1-2
Halogen-free	yes
Silicone-free	yes
RoHS compliant	yes
Approvals	UL-Style 20236 80°C 30V

#### Contact assembly

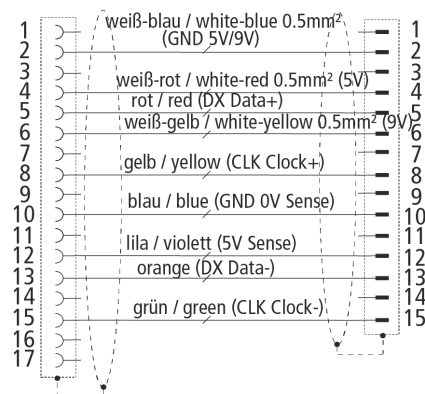

#### Dimensions

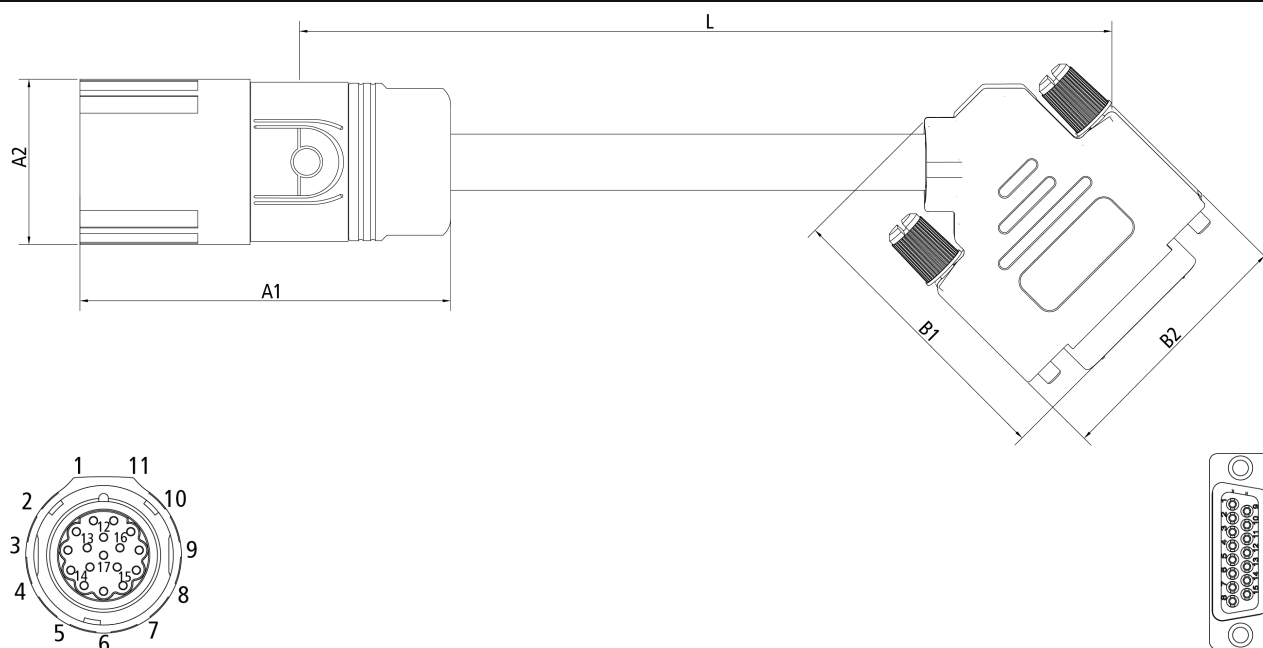

A1	59.00 mm
A2	26.00 mm
B1	46.00 mm
B2	41.00 mm

## Notes

- Depending on the cable length (L), the following length tolerances apply:  $\pm 2-3\%$
- Illustrations similar
- The last three digits of the ordering information is the cable length in decimeters, e.g. ZK4xxx-xxxx-x020 = cable length 2.00 m

Ordering information	Length
ZK4810-8020-xxxx	xxxx = cable length in decimetres
xxxx = 0050	example for 5 m length
	sold by the metre, admissible total cable length see documentation of Servo Drive

Beckhoff®, TwinCAT®, TwinCAT/BSD®, TC/BSD®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, Safety over EtherCAT®, TwinSAFE®, XFC®, XTS® and XPlanar® are registered trademarks of and licensed by Beckhoff Automation GmbH. Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.

© Beckhoff Automation GmbH & Co. KG 09/2021

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual application do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.