


ZK4701-0461-2xxx | Motor extension cable 0.75 mm² with itec® plug for motors with OCT, torsionable



itec (Series 915), plug, straight, female, Power: 3+PE, Signal: 5 – itec (Series 915), socket, straight, male, Power: 3+PE, Signal: 5



Plugs

Electrical data	Head A	Head B
Rated voltage (power)	630 V AC/DC	630 V AC/DC
Rated voltage (signal/24V)	63 V AC/DC	63 V AC/DC
Rated current (power)	14 A	14 A
Rated current (signal/24V)	3.6 A	3.6 A
Rated impulse voltage (power)	6.0 kV	6.0 kV
Rated impulse voltage (signal/24V)	1.5 kV	1.5 kV
Contact resistance	< 5 mΩ	< 5 mΩ
Mechanical data		
Accessories type	Connector/cable	Connector/cable
Installation size	itec (Series 915)	itec (Series 915)
Connector type	plug	socket
Configuration	straight	straight

Contact type	female	male
Number of positions (face)	Power: 3+PE, Signal: 5	Power: 3+PE, Signal: 5
Wire termination	crimp connection	crimp connection
Mating cycles	500	500
Way of locking	bayonet	bayonet
Weight per piece	0.035 kg (0.0772 lb)	0.035 kg (0.0772 lb)
Body color	black, similar to RAL 9011	-
Body material	zinc diecast/plastic	zinc diecast/plastic
Seal	FKM	FKM
Clamp ring	brass/nickel plated	brass/nickel plated
Contact carrier material	PBT, PA, UL 94 V-0	PBT, PA, UL 94 V-0
Contact material	brass/gold plated	brass/gold plated
Max. wire cross-section	-	AWG16 (1.5 mm ²)
Max. cable outer diameter	-	10.5 - 12.0 mm
Environmental data		
Special features	Max. height for operation 2000 m	Max. height for operation 2000 m
Shock resistance	30 g (conforms to EN 60060-2-27), 11 ms; 18 shocks per direction, 3 axes	30 g (conforms to EN 60060-2-27), 11 ms; 18 shocks per direction, 3 axes
Vibration resistance	10 g (conforms to EN 60068-2-27), 50 Hz...2000 Hz; 1 Octave/min.; 10 cycles per axis	10 g (conforms to EN 60068-2-27), 50 Hz...2000 Hz; 1 Octave/min.; 10 cycles per axis
Ambient temperature (operation)	-20...+130 °C, -4...+266 °F	-20...+130 °C, -4...+266 °F
Protection rating	IP66/67 in screwed condition	IP66/67 in screwed condition
Pollution level	3 (according to VDE 0110/EN61984 part 6.19.2.2)	3 (according to VDE 0110/EN61984 part 6.19.2.2)
Overvoltage category	3 (according to VDE 0110/EN61984 part 6.19.2.2)	3 (according to VDE 0110/EN61984 part 6.19.2.2)

Cable

Electrical data		
Rated voltage	≤ 300 V	
Operating voltage	max. 300 V AC (UL), U ₀ /U 300/500 V (VDE)	
Insulation resistance	≥ 500 MΩ * km (DIN EN 50395)	
Mutual capacitance	Signal: 45 ± 15 pF/m, Power: 90 pF/m (at 800 Hz according to EN 50289-1-5)	
Wire resistance (power)	≤ 26.0 Ω/km (DIN EN 50395)	
Wire resistance (signal/24V)	≤ 55.0 Ω/km (DIN EN 50395)	
Wire resistance (brake)	≤ 55.0 Ω/km (DIN EN 50395)	
Characteristic impedance	Signal: 110 Ω ± 10 Ω (10 MHz) acc. to EN50289-1-11	

Dielectric strength wire/wire (power)	2 kV 50 Hz 5 min. (DIN VDE 0472 T.509C)
Dielectric strength wire/shield (power)	2 kV 50 Hz 5 min. (DIN VDE 0472 T.509C)
Dielectric strength wire/wire (signal/24V)	2 kV 50 Hz 5 min. (DIN VDE 0472 T.509C)
Dielectric strength wire/shield (signal/24V)	2 kV 50 Hz 5 min. (DIN VDE 0472 T.509C)
Mechanical data	
Cross-section (power)	0.75 mm ² (approx. AWG18)
Cross-section (signal)	AWG22 (approx. 0.34 mm ²)
Cross-section (brake)	0.34 mm ² (AWG 22)
Min. bending radius, moved	12 x outer cable diameter
Min. bending radius, moved in drag-chain	12 x outer cable diameter
Min. bending radius, fixed installation	5 x outer cable diameter
Weight	190 kg/km (127.661 lb/1000 ft)
Outer cable diameter	12.0 mm ± 0.2 mm (0.472" ± 0.0079")
Conductor material (signal/24V)	copper bare
Optical covering factor of shielding	≥ 85%
Use	suitable for torsion/robotic application
Max. acceleration	30 m/s ² by 5 m travel distance 15 m/s ² by 10 m travel distance 5 m/s ² by 20 m travel distance
Max. speed	4 m/s
Max. travel distance	20 m (horizontal) 5 m (vertical)
Max. number of cycles	5 million
Wall thickness of wire insulation (power)	0.4 mm
Wall thickness of wire insulation (signal/24V)	0.58 mm
Wall thickness of wire insulation (brake)	0.32 mm
Wall thickness of jacket	1.1 mm
Jacket color	orange
Material jacket	PUR (polyurethane)
Wire insulation material	PP (polypropylene)
Printing on the jacket	Beckhoff Automation GmbH & Co. KG - D - Verl - 4 G 0,75 + (2x0,34)/C + (2x22AWG)/C D E170315 cRUus AWM STYLE 20233 AWM I/II A/B 80°C 300V FT1 XX/YY - DESINA - XX/YY = week of production / year of production
Printing color	black
Torsion angle in °/m	max. ± 180°/m
Max. tensile load, dynamic	20 N/mm ²

Max. tensile load, static 50 N/mm²

Environmental data

Operation temperature range, moved -20...+80 °C, -4...+176 °F. In drag-chain with mechanical strain: -20...+60 °C, -4...+140 °F

Operation temperature range, fixed installation -40...+80 °C, -40...+176 °F

Oil resistance according to DIN EN 60811-404

Flame-retardant according to IEC 60332-1-2

CFC-free yes


Halogen-free DIN VDE 0472 part 815

Silicone-free yes


UL yes, UL E-file number: E170315

Approvals UL758 (AWM) Style 20233 (jacket) and Style 10493 (core)

Contact assembly

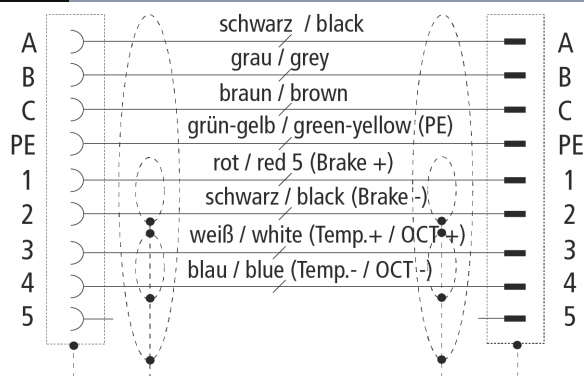

Dimensions

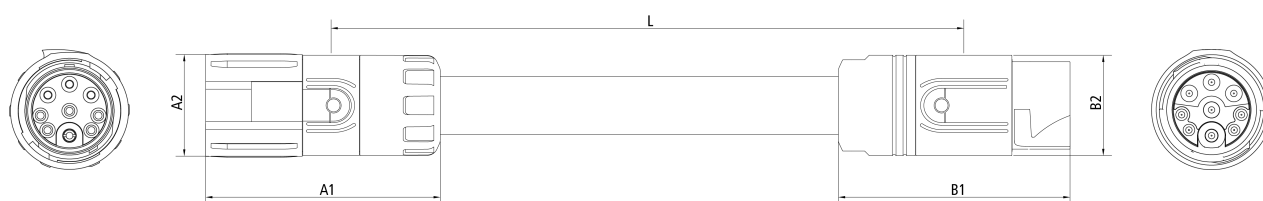

A1 44.00 mm

A2 19.00 mm

B1 44.00 mm

B2 19.00 mm

Notes

- Illustrations similar

Ordering information	Length
ZK4701-0461-2xxx	xxx = cable length in decimeters
xxx = 050	example for 5 m length
sold by the meter, admissible total cable length 20 m	

Accessories	
ZS4000-2100	metal flange for motor cable, itec®, M23 and feedback cable with itec®, to adjust the connector, including sealings



Beckhoff®, TwinCAT®, TwinCAT/BSD®, TC/BSD®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, Safety over EtherCAT®, TwinSAFE®, XFC®, XTS® and XPlanar® are registered trademarks of and licensed by Beckhoff Automation GmbH. Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.

© Beckhoff Automation GmbH & Co. KG 01/2022

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual application do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.